

K-TRAIL

HIGH-QUALITY · TOUGH · DURABLE

PRO SERIES

D8216 / DGON8216

MODEL



DGON8216-21-PS
subject to change

D8216-14-PS
subject to change


16-foot dump trailers with a capacity of 14,000, 16,000 or 21,000 lbs. These trailers are perfect for professionals who need to transport all their equipment and heavy loads.



GALVANIZED



DUMP



TANDEM



TRIDEM



GOOSENECK

	D8216-14-PS	D8216-16-PS	D8216-21-PS	DGON8216-14-PS	DGON8216-16-PS	DGON8216-21-PS
Interior (length x width x height)	192" x 82" x 24"					
Total (length x width)	261" x 102"			317" x 102"		
Tires / Rims	235-80-R16 (14 ply)	215-75-R17 (16 ply)	235-80-R16 (14 ply)	235-80-R16 (14 ply)	215-75-R17 (16 ply)	235-80-R16 (14 ply)
Coupler	2" 5/16			Gooseneck 2" 5/16		
Rear door configuration	Combo door					
Payload	10,000 lbs.	12,600 lbs.	18,000 lbs.	12,800 lbs.	13,500 lbs.	19,000 lbs.
Trailer weight	4,275 lbs.	4,520 lbs.	4,520 lbs.	4,575 lbs.	4,575 lbs.	5,200 lbs.
Axles	2 x 7,000 lbs.	2 x 8,000 lbs.	3 x 7,000 lbs.	2 x 7,000 lbs.	2 x 8,000 lbs.	3 x 7,000 lbs.
Cylinder capacity	12 tons					
Cylinder stroke	144"					



Printed in Canada

K-TRAIL

K-TRAIL.CA

INFO@K-TRAIL.CA | 877 248-7018


specifications may change without notice

PRO SERIES

D8216 / DGON8216 MODEL

FEATURES

- Bearing-assisted rolling tarp system
- Combo door
- Adjustable coupler
- Standard stabilizer legs
- Side plank holders
- 6 welded D-rings
- 3-stage hydraulic cylinder
- 2 sleeper spring suspension
- 1 x 12,000 lbs. drop leg jack on bumper model
- 2 x 12,000 lbs. drop leg jack on gooseneck models

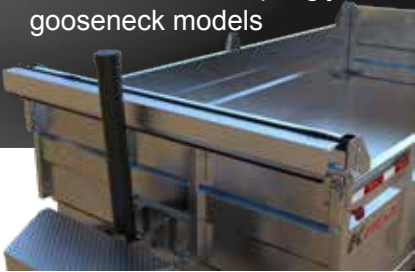

**STANDARD TARP
PROTECTOR**



EXTENSION

HARNESS

- Double contact 7-way plug
- LED lights
- Smart battery charger
- Aluminum toolbox



SLIDE-IN RAMPS



COMBO DOOR

FRAME

- 3" x 8" x 3/16" tubing frame
- 1/8" steel unibody design
- C3 crossmember every 16" C/C
- Steel diamond plate fenders
- Welded footboard



STABILIZER LEGS



ACCESSORIES & OPTIONS

spare tire, slide-in ramps, mesh side extension